

# (1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B242/18**

(3) Product: **Anchor device type A**  
**Type: LUX-top® FALZ-PLUS II**

(4) Manufacturer: **ST Quadrat S.A.**  
**11, rue Flaxweiler**  
**6776 GREVENMACHER / POTASCHBERG**  
**LUXEMBURG**

(5) Manufacturing plant: **ST QUADRAT Fall Protection S.A.**  
**45, rue Fuert**  
**5410 BEYREN**  
**LUXEMBURG**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 18-232.

(8) The requirements of the standard are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2017**

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2023-11-25.


DEKRA EXAM GmbH  
Bochum, 2018-11-26

signed: Wiegand  
Certification body

signed: Stickdorn  
Special services unit

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Certification body

  
Special services unit

## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate  
ZP/B242/18**
- (13) 13.1 Subject and Type  
Anchor device type A  
Type: LUX-top® FALZ-PLUS II

### 13.2 Description

The anchor device of type LUX-top® FALZ-PLUS II (Fig. 1) is used to protect a maximum of three persons against falls from a height at the same time and it is intended for being mounted on standing seam profiles or double standing seam profiles as well as suitable profile sheet panels of sufficient strength. The anchor device is fastened to the roof profiles using two two-part aluminium clamping rails. The base plate is screw-fastened with the inserted sheets on both sides and can be adjusted to the individual panel width via the long holes provided.

The possible panel widths are between 330 mm and 460 mm or 480 mm and 610 mm.

After having placed the profile on the roof, the two-part clamping rails are adjusted to the roof profiles. The two profile halves of the clamping rails will be bolted to each other by either two or four bolts (M10) with self-locking nuts.

In the middle of the base plate there is an edged eyelet which is bolted with a M16 screw. The anchor device is intended for loads in all directions parallel to the building surface. The individual anchor point is so designed that, if combined with the LUX-top® FSE 2003 wire-rope system, it is able to arrest the forces to be expected if loaded by a fall of a person from a height.

If this use is the case, the anchor device serves as an end anchor or intermediate structural anchor for wire-rope systems of type C according to DIN EN 795:2012 as made by the company ST QUADRAT Fall Protection S.A.

Instead of the attachment eyelet, appropriate wire-rope guiding components can be mounted as well.

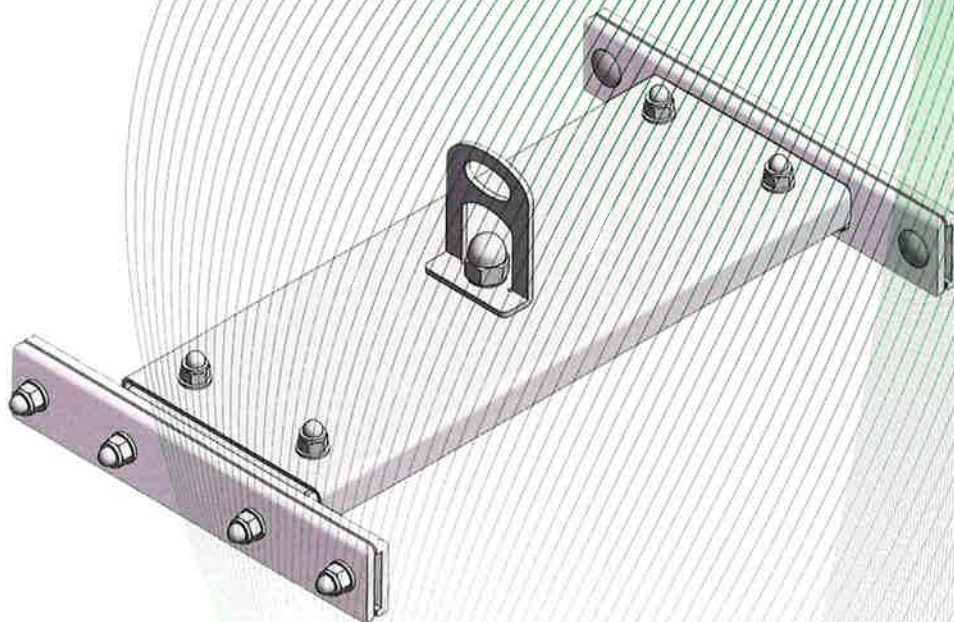


Fig. 1: Anchor device, type: LUX-top® FALZ-PLUS II

- (14) Test and Assessment Report

PB 18-232 dd. 2018-11-26